

EASY@TAKEOUT COMBO

innovating in the packaging industry







The EASY@TAKEOUT-COMBO is a take out system for all ISBM machine Brands.

MACHINE CHARACTERISTICS:

- ► Easy and fast format change
- ► 7" HMI color panel
- ➤ Simple Blow-molding Interface
- ➤ Servo Drive powered
- ► Integrated Inverter for Bottles conveyor
- ► Pneumatic-Mechanical gripper (no suction caps)

LEAKING TEST:

- ► Automatic calibration and leakage level allowed
- ▶ Programming by touchscreen of the working parameters: test time, rejection time, type of bottle, maximum level of leakage allowed, etc.
- ▶ Indication on display of the production data, number of good and bad parts, level of leaks in each test and maximum allowed
- ► Alarm pilot if several defective bottles are found
- ➤ Sensitivity 0,2 mbar (1 liter pores 0,1 mm)
- ► Pneumatic control and test equipment.

Set of 1 headstock composed of:

- ► Mobile arm with cylinder
- Leak and micro-leak detection headstock.

Rejection unit to install on conveyor:

- ► Installed power: 100 W
- ► Electrical power 220 VAC, 50 Hz
- ► Air supply: 6-8 Kg / cm²


TECHNICAL DATA	
POWER	3 x 400 V, 50 Hz, 1 Kw
DIMENSIONS	See layout
AIR PRESSURE	5-7 Bar






EASY@TAKEOUT COMBO

The EASY@TAKEOUT-COMBO is a take out system for all ISBM machine Brands.

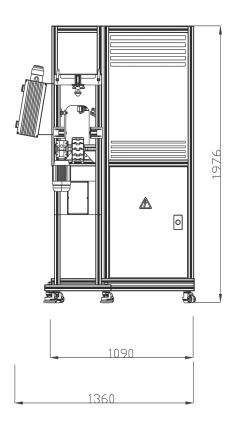

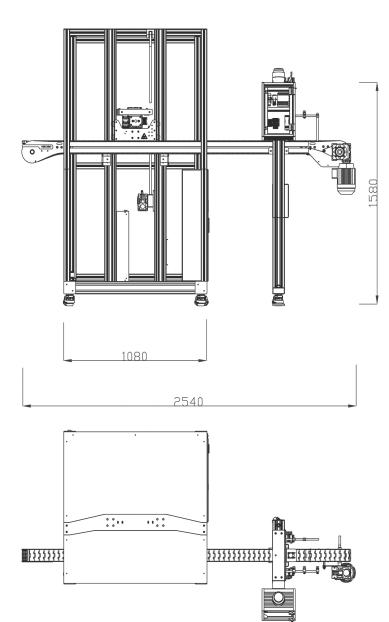





innovating in the packaging industry

